
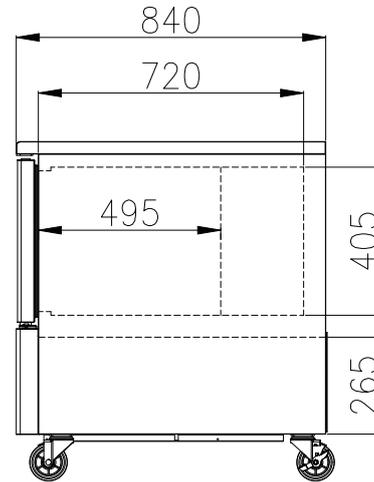
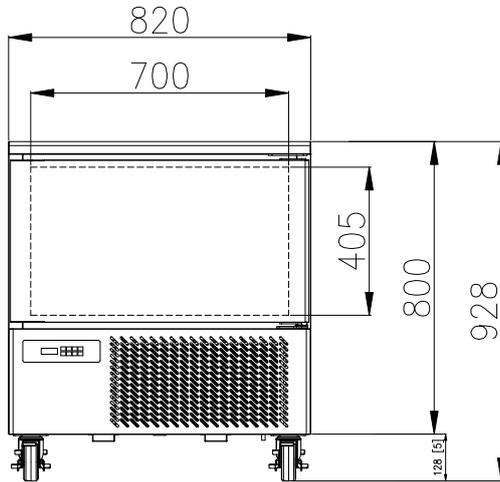


FBF-5

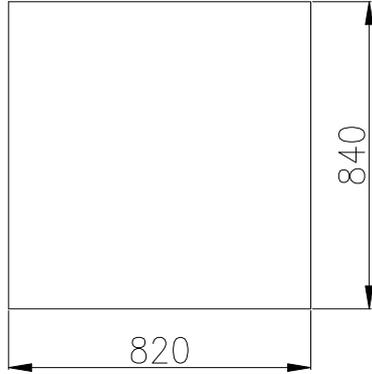

FEATURES

- Stainless steel finished top, front, sides and doors
- Stainless steel finished Interior

TEMPERATURE

- Soft chilling: 90°C to 3°C within 90 mins (Max Temp: 0°C)
- Hard chilling: 90°C to 3°C within 90 mins (Max Temp: -20°C)
- Freezing: 90°C to -18°C within 240 mins (Max Temp: -40°C)

PAN SIZE

- 1) GN PAN: 20.8 x 12.8 in (530 x 325mm)
- 2) EN PAN: 23.6 x 15.75 in (600 x 400mm)
- 3) BUN PAN: 26 x 18 in (660 x 457mm)
- 4) FULL PAN: 20 x 12 in (508 x 305mm)

CYCLE

CHILLING CYCLES

- Soft cycle (standard) - 90 mins
- Hard cycle (intensive) - 90 mins

FREEZING CYCLES

- Soft cycle (standard) - 240 mins
- Hard cycle (intensive) - 240 mins

Model	Capacity (ℓ)	Exterior Dimension (mm)			Interior Dimension (mm)			Net Weight (kg)	Amps	Voltage (V/Hz/Ø)	HP	Refrigerant	No. pan
		W	D	H	W	D	H						
FBF-5	140	820	840	928	700	485	405	110	5.2	220~240/50, 60/1	1	R-404A	5

* Design and specifications subject to change without notice

* Actual shipping weight may differ due to extra packing materials for product protection.