

HIGH TOP MOUNT UPRIGHT

UPRIGHT




FTM-23RS
FTM-23FS



FTM-49RS
FTM-49FS




FTM-72RS
FTM-72FS

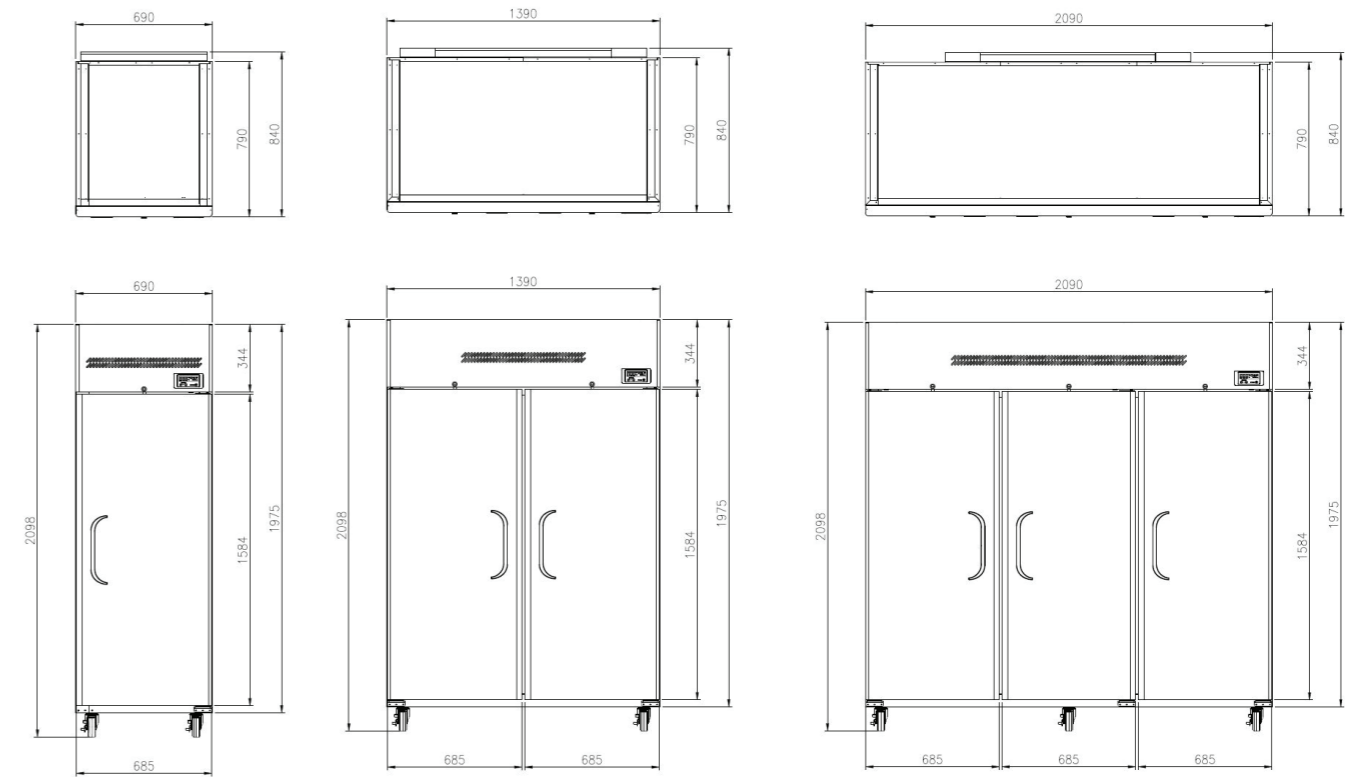

FTM-23RS / FTM-23FS

FTM-49RS / FTM-49FS

FTM-72RS / FTM-72FS

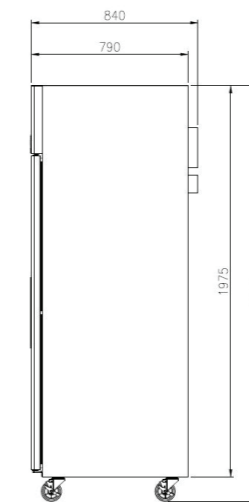

FEATURES

- Auto-closing doors & stopper
- Door pressure release device
- Magnetic door gasket
- Door sensor with magnetic switch
- Door locks
- Extra-large internal capacity

- Digital temperature control & monitor system
- 4" casters (brakes at front)
- LED lighting interior
- Stainless steel finished top, front, sides and doors
- PE coated sturdy wire shelves

TEMPERATURE

- Fridge: 0°C~5°C
- Freezer: -18°C

OPTIONAL MODELS

- Left hinged model (door reverse) (*only 23RS/23FS)

*The heights include the caster (123mm) *D: Defrost

Model	Capacity (l)		Exterior Dimension (mm)			Net Weight (kg)	Gross Weight (kg)	Power Supply	Amps	Watt	HP	Refrigerant	No. Shelves	No. Door	Type
	Gross	Net	W	D	H										
FTM-23RS	560	520	690	790	2,098	104	112	10A	3.2	400	3/8	R-134a	3	1	Fridge
FTM-49RS	1,236	1,160	1,390	790	2,098	150	167	10A	3.2	500	3/8	R-134a	6	2	Fridge
FTM-72RS	1,912	1,850	2,090	790	2,098	204	234	10A	6.0	900	1/2	R-404A	9	3	Fridge
FTM-23FS	560	520	690	790	2,098	112	120	10A	5.2	750	1/2	R-404A	3	1	Freezer
FTM-49FS	1,236	1,160	1,390	790	2,098	161	178	10A	5.5	1,090	3/4	R-404A	6	2	Freezer
FTM-72FS	1,912	1,850	2,090	790	2,098	220	250	10A	7.5	1,450	1 1/4	R-404A	9	3	Freezer