

BOTTOM MOUNT UPRIGHT

UPRIGHT




FRB-23RS
FRB-23FS



FRB-49RS
FRB-49FS



FRB-72RS
FRB-72FS

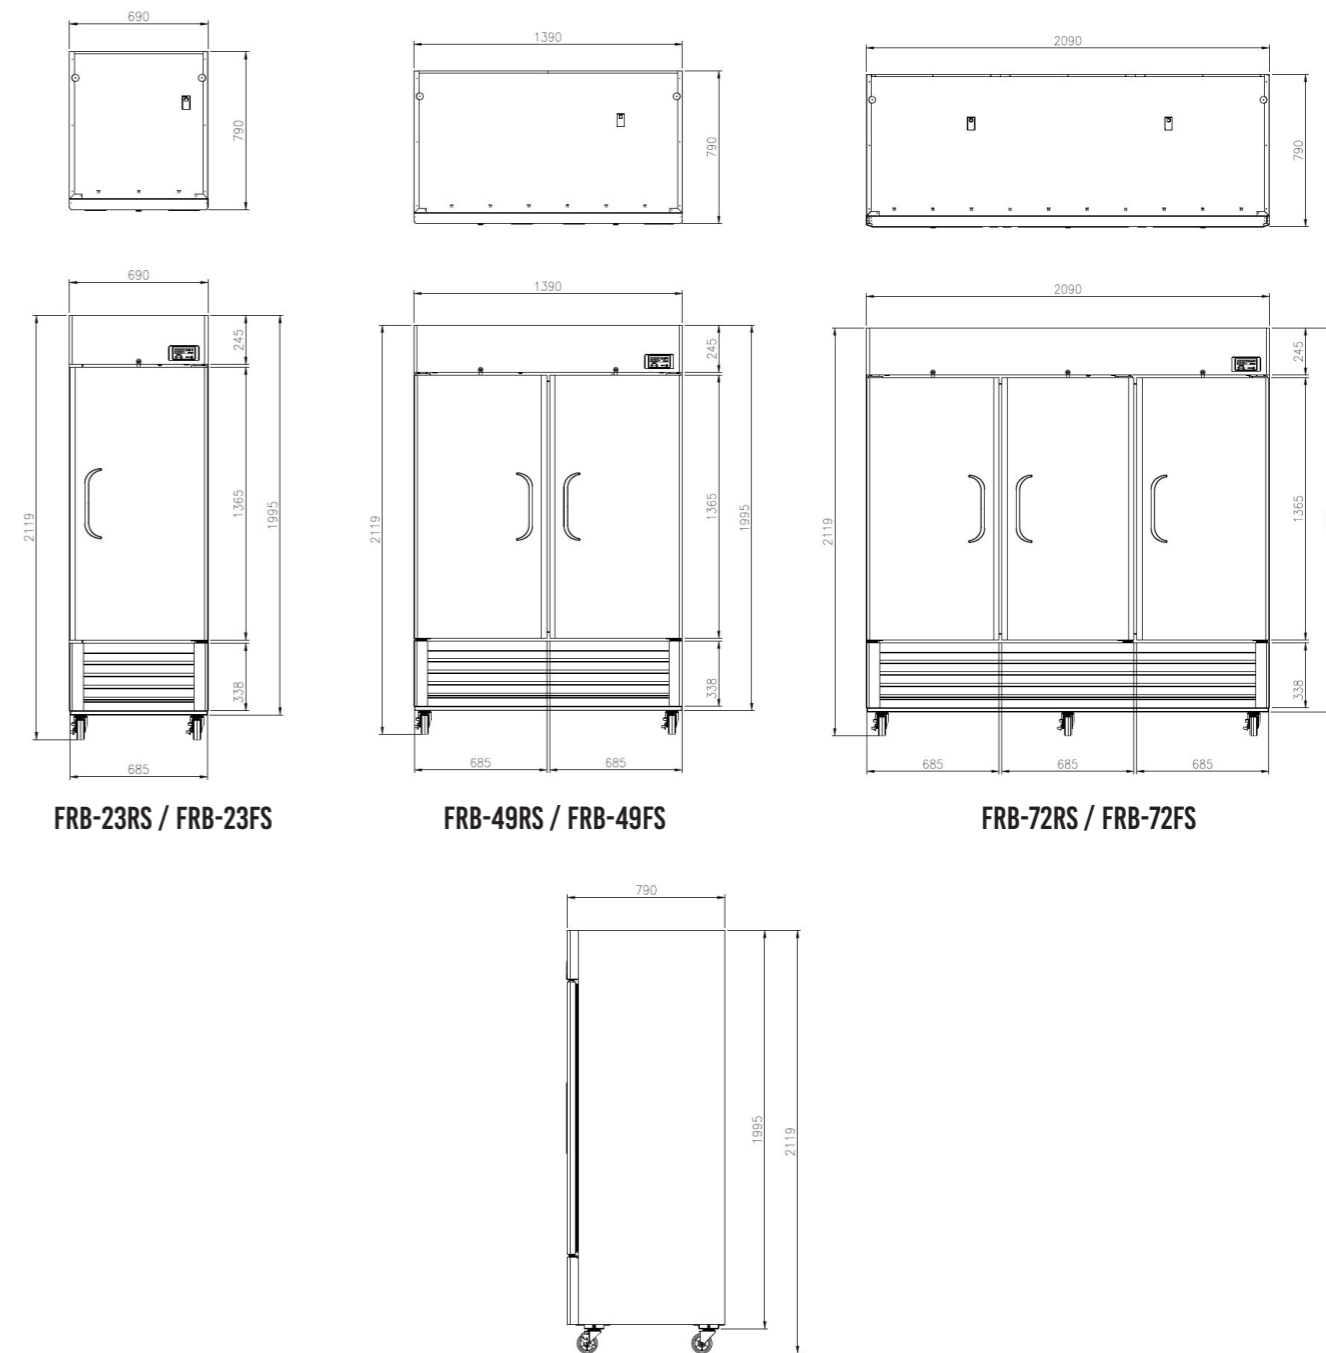

FEATURES

- Auto-closing doors & stopper
- Door pressure release device
- Magnetic door gasket
- Door sensor with magnetic switch
- Door locks
- Extra-large internal capacity

- Digital temperature control & monitor system
- 4" casters (brakes at front)
- LED lighting interior
- Stainless steel finished top, front, sides and doors
- PE coated sturdy wire shelves

TEMPERATURE

- Fridge: 0°C ~ 5°C
- Freezer: -18°C

OPTIONAL MODELS

- Left hinged model (door reverse) (*only 23RS/23FS)
- GN pan compatible model

*The heights include the caster (124mm) *D: Defrost

Model	Capacity (ℓ)		Exterior Dimension (mm)			Net Weight (kg)	Gross Weight (kg)	Power Supply	Amps	Watt	HP	Refrigerant	No. Door	Type
	Gross	Net	W	D	H									
FRB-23RS	560	516	690	790	2,119	108	116	10A	3.2	400	3/8	R-134a	1	Fridge
FRB-49RS	1,236	1,159	1,390	790	2,119	165	182	10A	3.2	500	3/8	R-134a	2	Fridge
FRB-72RS	1,912	1,805	2,090	790	2,119	220	250	10A	6.0	900	1/2	R-404A	3	Fridge
FRB-23FS	560	516	690	790	2,119	120	128	10A	5.2	750	1/2	R-404A	1	Freezer
FRB-49FS	1,236	1,159	1,390	790	2,119	177	194	10A	5.5	1,090	3/4	R-404A	2	Freezer
FRB-72FS	1,912	1,805	2,090	790	2,119	232	262	10A	7.5	1,450	1 1/4	R-404A	3	Freezer